


Industry




Industry


Available Items

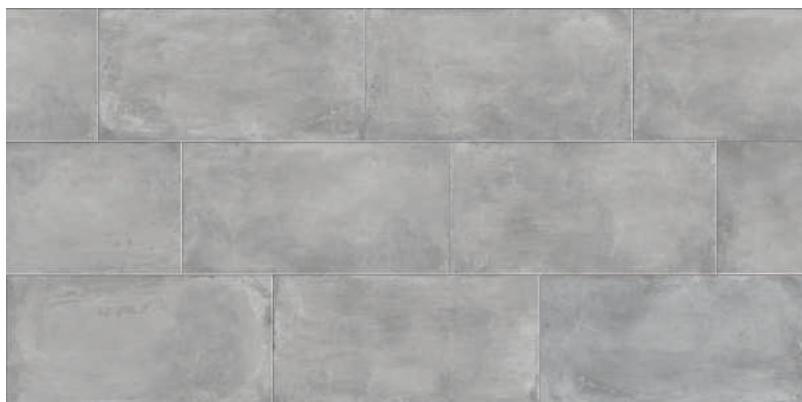


Ash
12x24 Field
24x24 Field
2x2 Mosaic

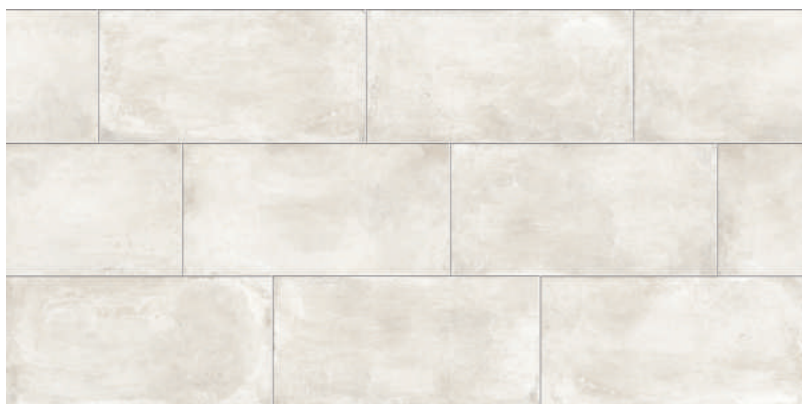

Chalk
12x24 Field
24x24 Field
2x2 Mosaic

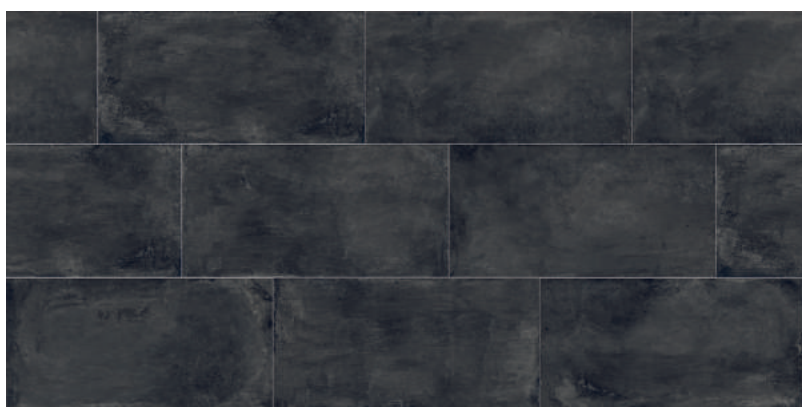



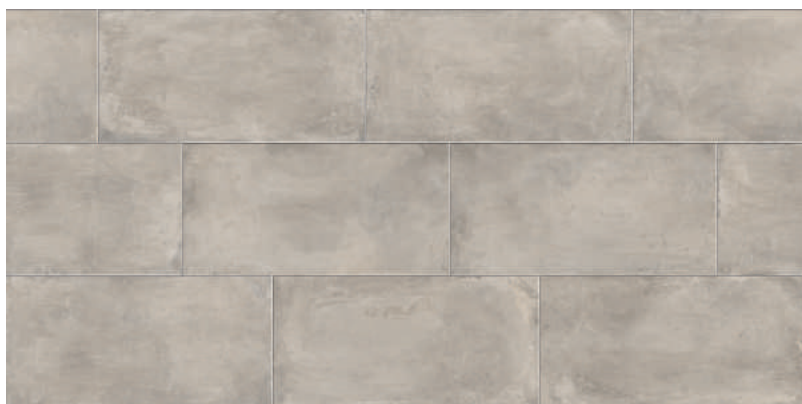




Coal
12x24 Field
24x24 Field
2x2 Mosaic



Greige
12x24 Field
24x24 Field
2x2 Mosaic

Industry

Technical Data

| | | REFERENCE VALUE | DECLARED VALUE | TEST METHOD |
|---|------------------------------------|--------------------|----------------------|----------------|
|  | SURFACE ABRASION | | IV | ASTM C1027 |
|  | WATER ABSORPTION | ≤0.5% | MEETS REQUIREMENT | ASTM C373 |
|  | CHEMICAL RESISTANCE | AS REPORTED | NOT AFFECTED | ASTM 650 |
|  | DYNAMIC COEFFICIENT OF FRICTION | ≥0.66 WET | MEETS REQUIREMENT | ANSI A137.1 |
|  | STAIN RESISTANCE | AS REPORTED | NOT AFFECTED | ASTM C1378 |
|  | BREAKING STRENGTH | AS REPORTED | ≥400 | ASTM C648 |
|  | RESISTANCE TO FREEZE | AS REPORTED | RESISTANT | ASTM C1026 |